

INT300® Protection Module

for Pt100 Sensors acc. to EN 60751



INT300 Protection Module

Application:

For motors and refrigeration compressors, as well as for

motors with high short-circuit current densities.

Functional description:


The 20-turn spindle potentiometer mounted in the unit is set to the middle position at our works, which corresponds to a trip point of approx. 120°C. With a screwdriver, the trip point of the potentiometer can be lowered to approx. 60°C by turning anti-clockwise or increased to about 180°C by turning clockwise. In case of a lowresistive measuring circuit, i.e. below the trip point, the internal relay is

energized. When the set temperature limit is exceeded or when one or several sensors in the measuring circuit are interrupted the relay drops out and the red LED fault display lights up. The resistance determined by the length of the wire affects the trip point. A wire resistance of 1Ω lowers the trip point by approx. 3K. The unused inputs must be connected to the common terminal PO.



The unit must be connected by trained electrical personnel. All valid standards for connecting electrical equip-

ment must be observed. Limit values for the supply voltage of the unit may not be exceeded.

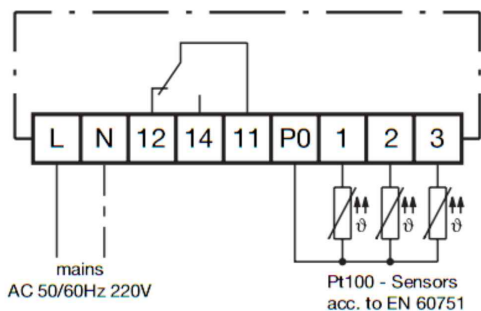

Connection Diagram


Technical data

| | |
|------------------------|--|
| Supply voltage | AC 50/60Hz 220V -15...+10% |
| Power consumption | 5VA |
| Amb. temperature range | -30...+60°C |
| Measuring circuit | 3 |
| - Type of sensor | Pt100 acc. to EN 60751 |
| - Number of sensors | 1 each (measuring circuit) |
| Measuring circuit o/c | DC 15V |
| Measuring circuit s/c | DC 3,5mA |
| Relay output | AC 250V, max. 5A, 300VA ind. |
| Service life | approx. 1 mio. switching cycles |
| Housing | PA6 GF30 |
| Protection class | with terminal cover: IP20 without terminal cover: IP00 |
| acc. to EN 60529 | |
| Mounting | 35mm standard rail, acc. to DIN EN 50022 or screw-mounted |
| Dimensions | 87 x 40 x 113mm |
| Weight | approx. 350g |

Ordering information

| | |
|---|--------------|
| +60°C to 180°C | 52 A 221 |
| +60°C to 180°C with lockout function | 52 A 221 S21 |
| +90°C to 250°C with lockout function | 52 A 221 S24 |

Other trip points and voltages on request

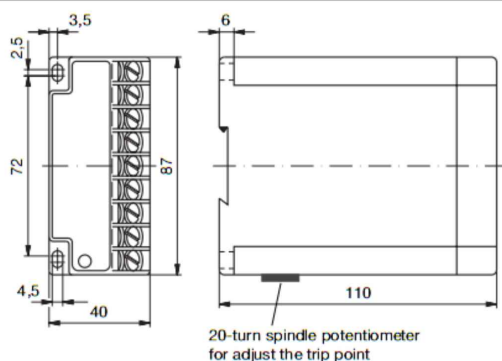

Dimensions in mm

Subject to technical modifications without notice