




日本富士端子FUJI Terminal 连接器端子 叉形端子 无绝缘叉形端子 (FUJI Trminal DIN46234 Spade Terminals NON- INSULATED SPADE TERMINALS)

采购热线：021-62041958,021-62041956

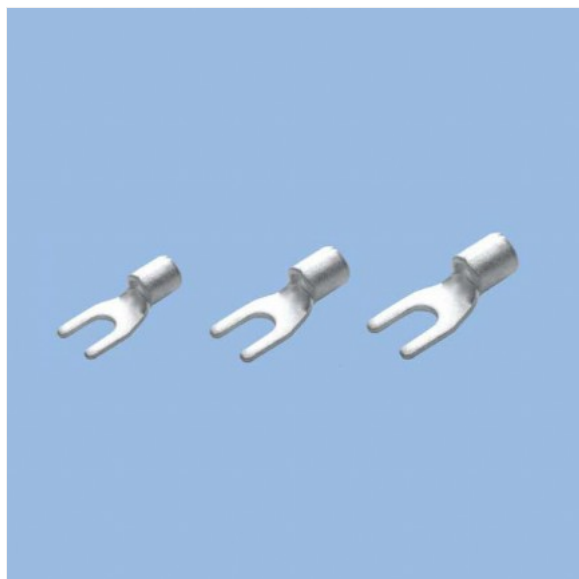


微信扫一扫左侧二维码，
手机/平板浏览本产品信息

功能特点

产品介绍：
材质：紫铜
镀层：锡

规格尺寸

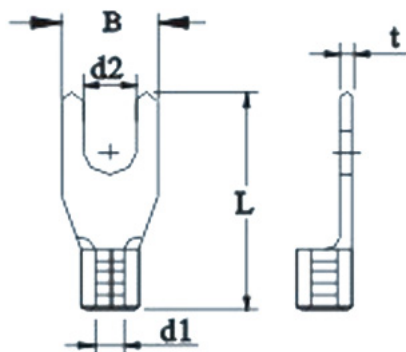

技术参数

ITEM NO 品名	DIMENSIONS 尺寸 inch(mm)					STANDARD PACKING 包装方式 (PIECE)		STUD SIZE	WIRE RANGE 电线范围 A.W.G. mm²
	d1	d2	B	L	t	BOX 盒子	CARTON 纸箱		
BRAZED SEAM 焊接									
S0.5-3B	0.043	0.087(2.2)	0.205(5.2)	0.488(12.4)	0.020	10,000	60,000	#4	22-20 A W G

S0.5-3.5B	(1.1)	0.146(3.7)	0.260(6.6)	0.551(14.0)	(0.5)	10,000	60,000	#6	0.2-0.5 mm ²
S0.5-4B		0.169(4.3)				10,000	60,000	#8	
S1.25-3B	0.075 (1.9)	0.126(3.2)	0.224(5.7)	0.630(16.0)	0.030 (0.75)	2,000	30,000	#4	22-16 A.W.G. 0.5-1.5 mm ²
S1.25-3.5SB		0.146(3.7)	0.224(5.7)	0.630(16.0)		2,000	30,000	#6	
S1.25-3.5B		0.146(3.7)	0.244(6.2)	0.630(16.0)		2,000	30,000	#6	
S1.25-4SB		0.169(4.3)	0.252(6.4)	0.630(16.0)		2,000	30,000	#8	
S1.25-4B		0.169(4.3)	0.283(7.2)	0.630(16.0)		2,000	30,000	#8	
S1.25-5B		0.209(5.3)	0.315(8.0)	0.630(16.0)		1,000	15,000	#10	
S1.25-6B		0.252(6.4)	0.421(10.7)	0.669(17.0)		1,000	10,000	1/4	
S1.25-6SB		0.252(6.4)	0.366(9.3)	0.669(17.0)		1,000	10,000	1/4	
S1.25-8B		0.331(8.4)	0.531(13.5)	0.871(22.1)		1,000	10,000	5/16	
S1.25-10B		0.413(10.5)	0.591(15.0)	0.886(22.5)		1,000	10,000	3/8	
S2-3B	0.098 (2.5)	0.126(3.2)	0.224(5.7)	0.630(16.0)	0.031 (0.8)	1,000	15,000	#4	16-14 A.W.G. 1.5-2.5 mm ²
S2-3.5SB		0.146(3.7)	0.224(5.7)	0.630(16.0)		1,000	15,000	#6	
S2-3.5B		0.146(3.7)	0.244(6.2)	0.630(16.0)		1,000	15,000	#6	
S2-4SB		0.169(4.3)	0.252(6.4)	0.630(16.0)		1,000	15,000	#8	
S2-4B		0.169(4.3)	0.283(7.2)	0.630(16.0)		1,000	15,000	#8	
S2-5B		0.209(5.3)	0.315(8.0)	0.630(16.0)		1,000	15,000	#10	
S2-6B		0.252(6.4)	0.421(10.7)	0.669(17.0)		1,000	10,000	1/4	
S2-6SB		0.252(6.4)	0.366(9.3)	0.669(17.0)		1,000	10,000	1/4	
S2-8B		0.331(8.4)	0.531(13.5)	0.871(22.1)		1,000	10,000	5/16	
S3.5-3.5B	0.133 (3.4)	0.146(3.7)	0.287(7.3)	0.709(18.0)	0.039 (1.0)	500	7,500	#4	14-12 A.W.G. 2.5-4 mm ²
S3.5-4B		0.169(4.3)	0.315(8.0)	0.709(18.0)		500	7,500	#8	
S3.5-5B		0.209(5.3)	0.315(8.0)	0.709(18.0)		500	7,500	#10	
S3.5-6B		0.260(6.6)	0.472(12.0)	0.886(22.0)		500	5,000	1/4	
S5.5-3B	0.141 (3.6)	0.126(3.2)	0.287(7.3)	0.768(19.5)	0.039 (1.0)	500	7,500	#4	12-10 A.W.G. 4-6 mm ²
S5.5-3.5SB		0.146(3.7)	0.248(6.3)	0.768(19.5)		500	7,500	#6	
S5.5-3.5B		0.146(3.7)	0.319(8.1)	0.728(18.5)		500	7,500	#6	
S5.5-4B		0.169(4.3)	0.323(8.2)	0.768(19.5)		500	7,500	#8	
S5.5-4SB	0.141 (3.6)	0.169(4.3)	0.248(6.3)	0.768(19.5)	0.039 (1.0)	500	7,500	#8	12-10 A.W.G. 4-6 mm ²
S5.5-5B		0.209(5.3)	0.354(9.0)	0.768(19.5)		500	7,500	#10	
S5.5-6B		0.252(6.4)	0.472(12.0)	0.909(23.1)		500	500	1/4	
S5.5-6SB		0.252(6.4)	0.354(9.0)	0.906(23.0)		500	500	1/4	
S5.5-8B		0.331(8.4)	0.531(13.5)	0.984(25.0)		500	500	5/16	
S8-4B	0.189 (4.8)	0.173(4.4)	0.323(8.2)	0.937(23.8)	0.039 (1.0)	2,000	12,000	#8	8 A.W.G. 8 mm ²
S8-5B		0.213(5.4)	0.354(9.0)	0.937(23.8)		2,000	12,000	#10	
S8-5B(t=1.2)	0.177 (4.5)	0.213(5.4)	0.429(10.9)	1.063(27.0)	0.047 (1.2)	2,000	12,000	#10	
S8-6B	0.189 (4.8)	0.260(6.6)	0.465(11.8)	0.937(23.8)	0.039 (1.0)	1,500	9,000	1/4	
S8-6B(t=1.2)	0.177 (4.5)	0.252(6.4)	0.429(10.9)	1.063(27.0)	0.047 (1.2)	1,500	9,000	1/4	
S14-6B	0.228 (5.8)	0.252(6.4)	0.433(11.0)	1.004(25.5)	0.043 (1.1)	1,000	6,000	1/4	6 A.W.G. 14 mm ²
S14-8B		0.331(8.4)	0.543(13.8)	1.122(28.5)		1,000	6,000	5/16	
S22-4B	0.311 (7.9)	0.177(4.5)	0.504(12.8)	1.142(29.0)	0.047 (1.2)	500	3,000	#8	4 A.W.G. 22 mm ²
S22-4SB	0.303 (7.7)	0.169(4.3)	0.315(8.0)	0.925(23.5)	0.039 (1.0)	500	3,000	#8	
S22-5B	0.311 (7.9)	0.217(5.5)	0.472(12.0)	1.181(30.0)	0.047 (1.2)	500	3,000	#10	
S22-6B		0.260(6.6)	0.512(13.0)	1.220(31.0)		500	3,000	1/4	

S22-8B		0.339(8.6)	0.590(15.0)	1.299(33.0)		500	3,000	5/16	
--------	--	------------	-------------	-------------	--	-----	-------	------	--